


TECHNICAL DATA

SANICUBIC® Classic


Performance curve

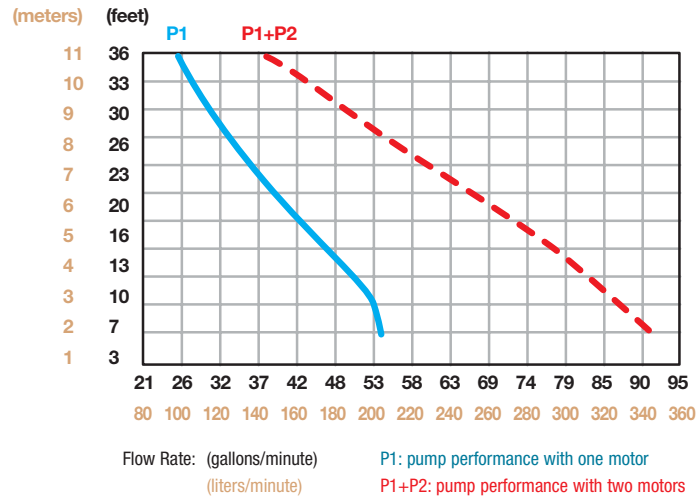

Discharge pipe diameter	1½" (3.8 cm)
Vent stack	1½" (3.8 cm)
Vertical discharge	36 ft. (11 m)
Horizontal discharge	328 ft. (100 m)
Power	220/240 Volts - 60 Hz - Single phase
Power rating	2 x 1 HP
Maximum current input	13 A
Working temperature	104°F (40°C)
Maximum temperature	158°F (70°C) (short period)
Net weight (including accessories)	66.1 lbs. (30 kg)
Part Number	029

SANICUBIC® Classic

is the best solution to pump away waste water from all fixtures connected to the soil stack.

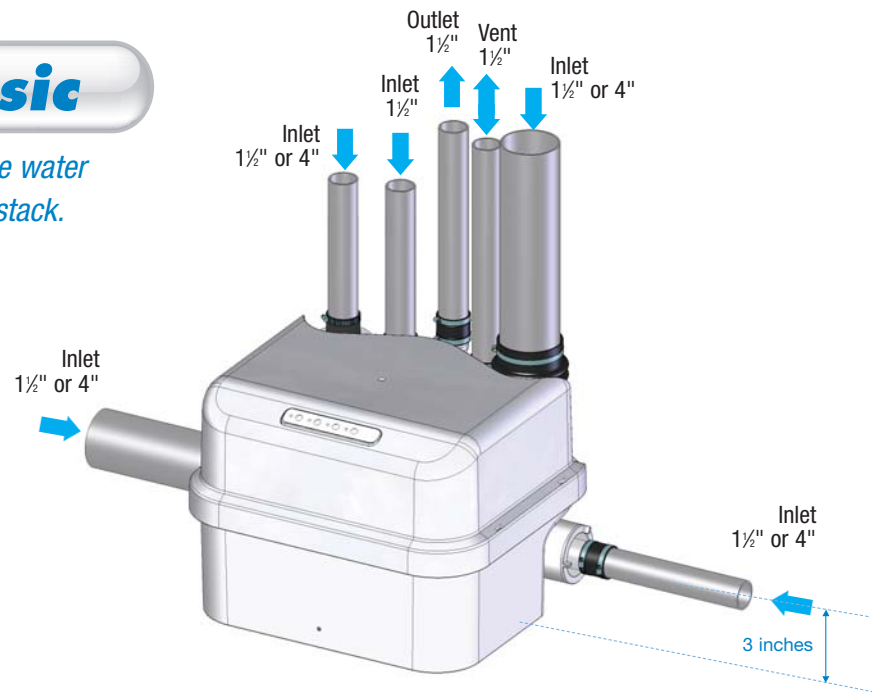

SANIFLO®

A Group SFA Company

U.S. - 105 Newfield Avenue, Suite B, Edison, NJ 08837
Toll Free: 1-800-571-8191

Canada - 1 - 685 Speedvale Avenue West, Guelph, ON N1K 1E6
Toll Free: 1-800-363-5874

www.saniflo.com

www.saniflo.ca

SANIFLO®

A Group SFA Company

SANICUBIC® Classic

THE NEW GENERATION OF DUPLEX SYSTEM

For homes and commercial applications



2-Year Warranty



THE BENEFITS of **SANICUBIC® Classic**

SANICUBIC Classic® is a pre-assembled heavy duty grinder pump that meets the demanding needs of commercial and residential sewage applications. The two grinder system made of stainless steel liquefies solids into small particles prior to being passed through the 1½" discharge. It's designed to handle multiple waste fixtures for applications such as residential single or group homes, commercial buildings, schools and many more.

PERFORMANCES


- 2 x 1 HP heavy duty motors, oil filled
- Pumps up to 36 ft. vertically
- Pumps up to 328 ft. horizontally
- Suitable for several fixtures producing waste water up to 60 gallons per minute

SECURITY

- Alarm mounted on the unit
- Thermally protected
- Easy installation above the floor
- Dual motor for absolute reliability and power

GRINDER PUMP

- Two stainless steel 2 HP grinder pumps
- Accepts accidental flushing of sanitary items such as feminine hygiene products

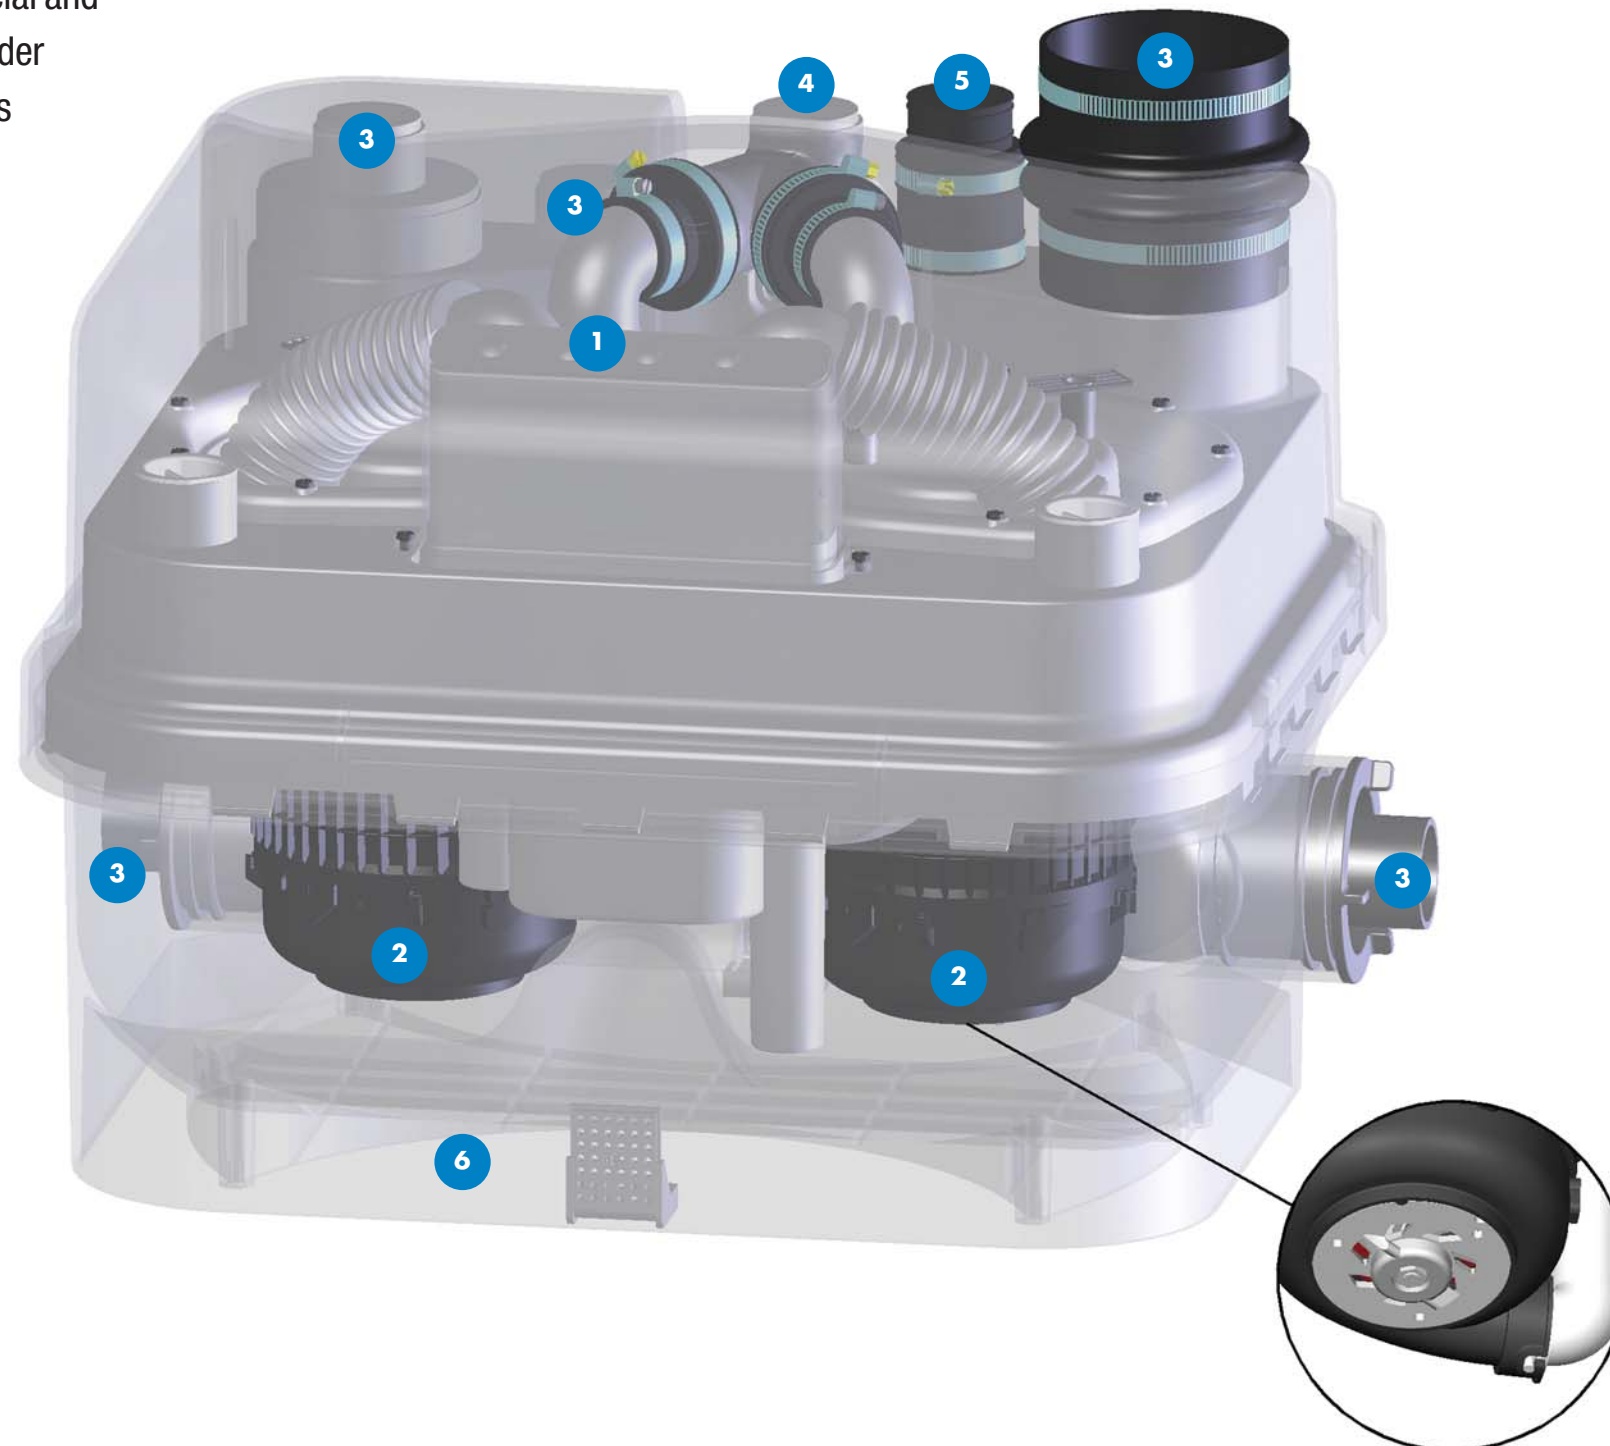

- 1 CONTROL PANEL**
(Alarm, LED power control, and Over Load Indicator)
- 2 MOTORS**
Two stainless steel 1 HP grinder pumps
- 3 INLET - UP TO 5 INLETS**
4 inlets - 1½" or 4"
1 inlet - 1½"
(coupling provided)
- 4 DISCHARGE**
1½" with check valves built inside
- 5 VENT**
1½"
- 6 DIMENSIONS**
W 23¾" x D 19¼" x H 16½"